



## ISTS100,ISTS200



### DESCRIPTION

The ISTS100 and ISTS200 series of opaque photointerrupters are single channel switches consisting of a Gallium Arsenide infrared emitting diode and a NPN silicon photo transistor mounted in a polycarbonate housing. The package is designed to optimise the mechanical resolution, coupling efficiency, ambient light rejection, cost and reliability.

Operating on the principle that objects opaque to infrared will interrupt the transmission of light between the infrared emitting diode and the photo sensor, switching the output from an "ON" state to an "OFF" state.

These photointerrupters are in PWB mounting packages while ISTS200 also provides flanges for Screw Mounting.

### FEATURES

- High Gain
- 3mm Gap between LED and Detector
- Polycarbonate Case Protection against Ambient Light
- Pb Free and RoHS Compliant


### APPLICATIONS

- Copiers, Printers, Facsimiles
- Record Players, Cassette Decks
- Optoelectronic Switches

### ORDER INFORMATION

- Supplied in Bulk Package

Top View

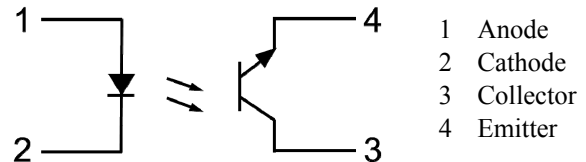

### ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C)

Stresses exceeding the absolute maximum ratings can cause permanent damage to the device.

Exposure to absolute maximum ratings for long periods of time

#### Input

Forward Current	50mA
Reverse Voltage	5V
Power dissipation	75mW

#### Output

Collector Current	20mA
Collector-Emitter Voltage	30V
Emitter-Collector Voltage	5V
Power Dissipation	100mW

#### Total Package

Operating Temperature	-25 to 85 °C
Storage Temperature	-55 to 100 °C
Lead Soldering Temperature (10s)	260°C

can adversely affect reliability.

#### ISOCOM COMPONENTS 2004 LTD

Unit 25B, Park View Road West, Park View Industrial Estate  
Hartlepool, Cleveland, TS25 1PE, United Kingdom  
Tel : +44 (0)1429 863 609 Fax : +44 (0)1429 863 581  
e-mail : sales@isocom.co.uk  
<http://www.isocom.com>

#### ISOCOM COMPONENTS ASIA LTD

Hong Kong Office,  
Block A, 8/F, Wah Hing Industrial mansion,  
36 Tai Yau Street, San Po Kong, Kowloon, Hong Kong.  
Tel : +852 2995 9217 Fax : +852 8161 6292  
e-mail : sales@isocom.com.hk



## ISTS100,ISTS200

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise specified)

#### INPUT

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
Forward Voltage	$V_F$	$I_F = 20\text{mA}$		1.2	1.6	V
Reverse Current	$I_R$	$V_R = 5\text{V}$			100	$\mu\text{A}$

#### OUTPUT

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
Collector-Emitter Dark Current	$I_{CEO}$	$V_{CE} = 10\text{V}$			100	nA

#### COUPLED

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
On-State Collector Current	$I_{C(ON)}$	$I_F = 30\text{mA}, V_{CE} = 5\text{V}$	1.9			mA
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_F = 20\text{mA}, I_C = 0.25\text{mA}$			0.4	V

#### SWITCHING

Parameter	Symbol	Test Condition	Min	Typ.	Max	Unit
Output Rise Time (10% to 90%)	$t_r$	$V_{CE} = 5\text{V}, I_C = 2\text{mA}$ $R_L = 100\Omega,$		3	15	$\mu\text{s}$
Output Fall Time (90% to 10%)	$t_f$			4	20	



**ISTS100,ISTS200**

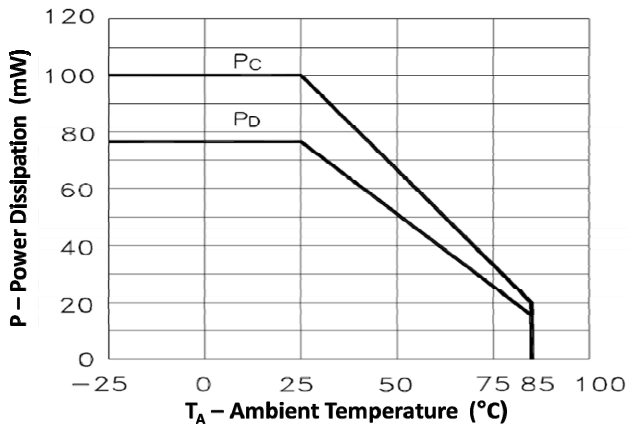


Fig 1 Power Dissipation vs Ambient Temperature

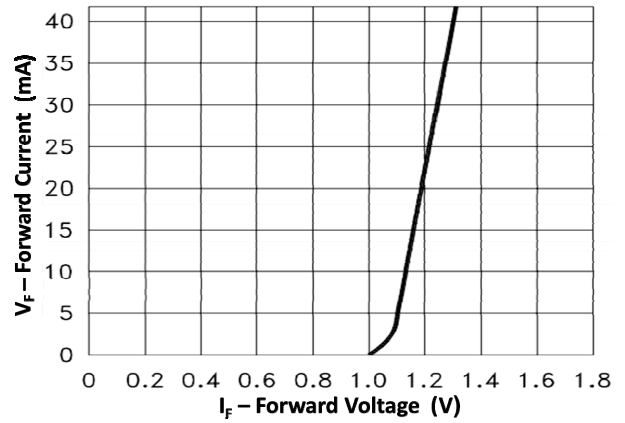


Fig 2 Forward Current vs Forward Voltage

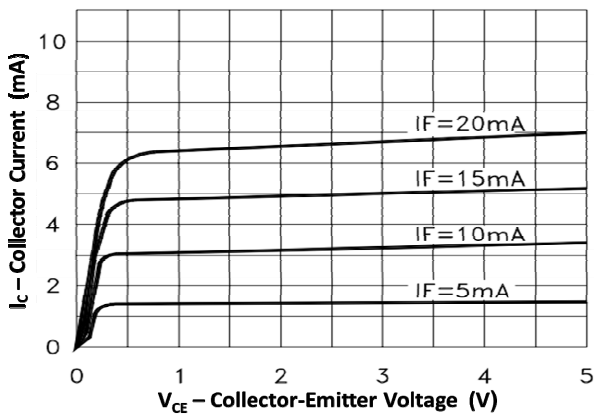


Fig 3 Collector Current vs Collector-Emitter Voltage

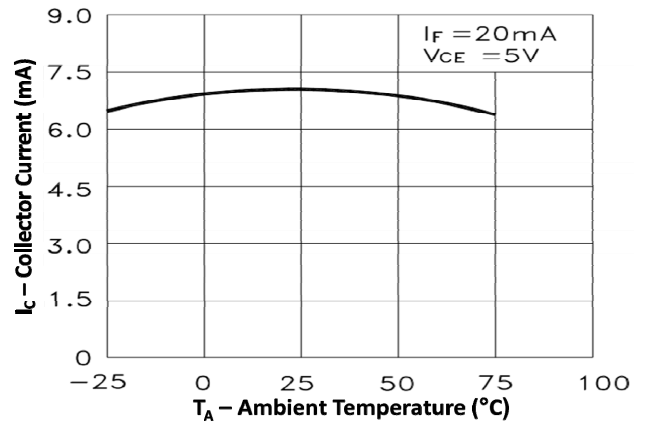


Fig 4 Collector Current vs Ambient Temperature




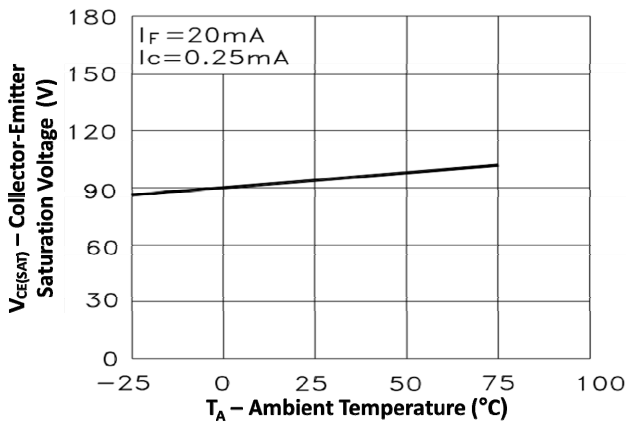


Fig 5 Collector-Emitter Saturation Voltage vs  $T_A$



**Fig 6 Response Time vs Load Resistance**

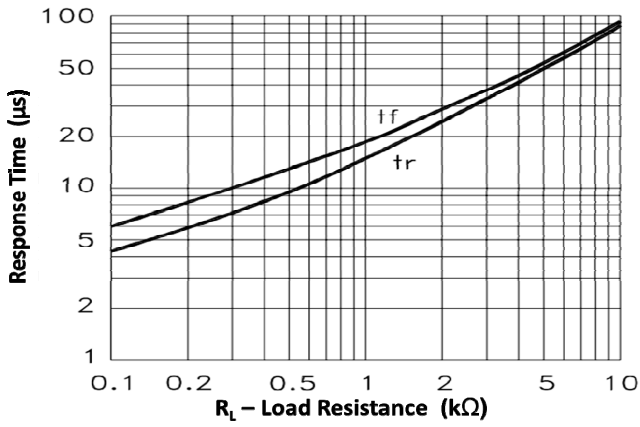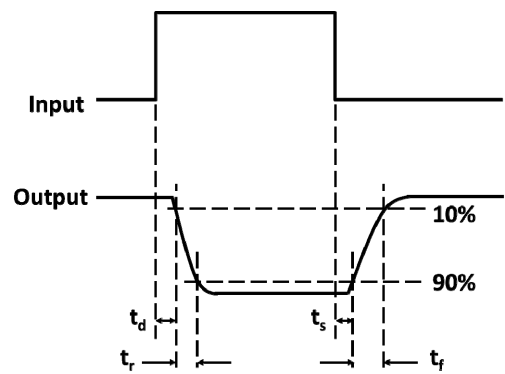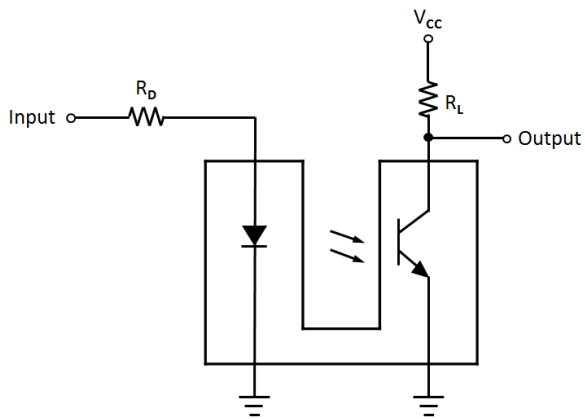

**Test Circuit for Response Time**




**ISTS100,ISTS200**

**ORDER INFORMATION**


ISTS100,ISTS200			
After PN	PN	Description	Packing quantity
None	ISTS100, ISTS200	Bulk Package	500pcs

**DEVICE MARKING**

**ISTS200**

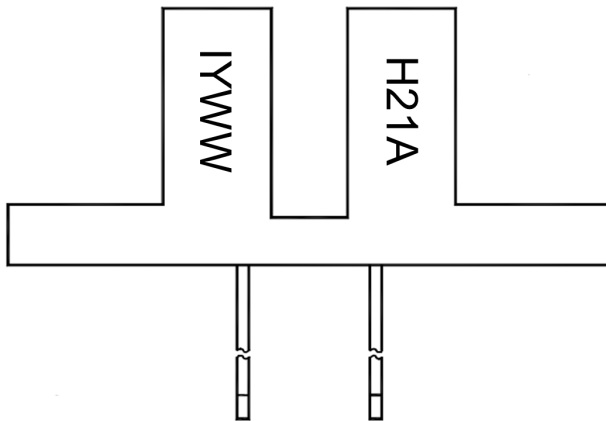

**ISTS100**

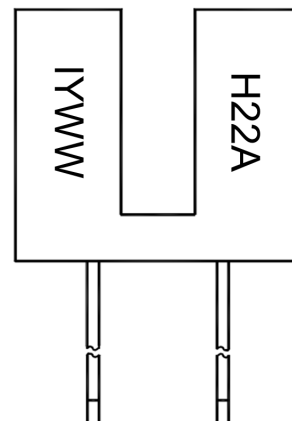

H21A / H22A denotes Device Part Number

I denotes Isocom

Y denotes 1 digit Year code

WW denotes 2 digit Week code

Note :           ISTS200 Type will be Marked "H21A"  
                       ISTS100 Type will be Marked "H22A"




## ISTS100,ISTS200

### PACKAGE DIMENSIONS in inch(mm)

Tolerance :  $\pm 0.010''$  (0.25mm) unless otherwise noted.

ISTS200

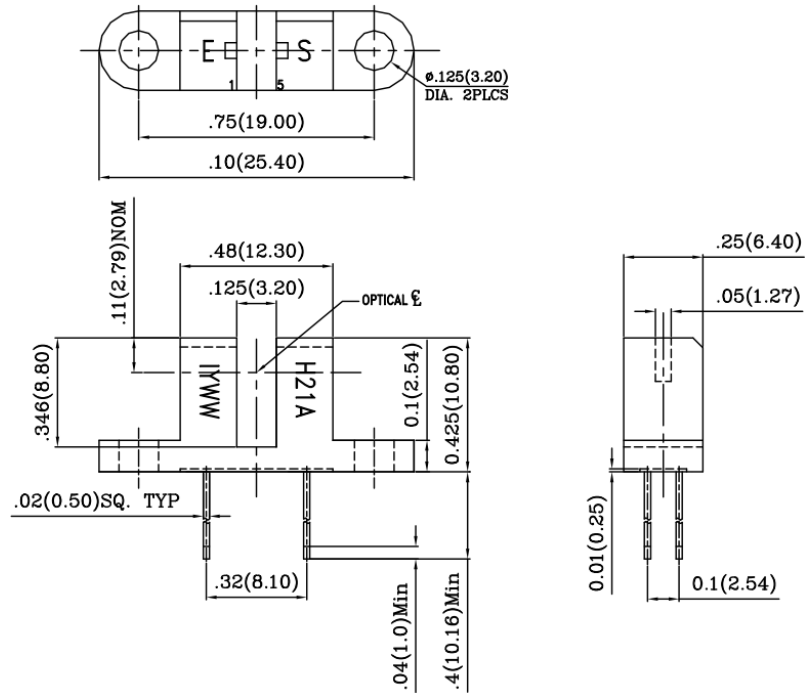

ISTS100

